

LED Utility2 T8 Tube Double Ends

Features

- Flicker free driver
- Energy efficient
- Long lifespan

Benefits

- Stress free ambient light
- Up to 60% energy saving compared to conventional T8 Tube
- Last 2 times longer than conventional T8 Tube with electromagnetic system

Application



Home



Hotel



Restaurant



Shopping Mall

Specification

Item Description	Power (W)	Power Factor	Lumen (lm)	Efficacy (lm/W)	CRI	CCT (K)	Life Time (hrs) L70
LED-T8-U2-dbl-9W-600mm-3000K	9	0.5	800	90	70	3000	15000
LED-T8-U2-dbl-9W-600mm-4000K	9	0.5	800	90	70	4000	15000
LED-T8-U2-dbl-9W-600mm-6500K	9	0.5	800	90	70	6500	15000
LED-T8-U2-dbl-18W-1200mm-3000K	18	0.5	1600	90	70	3000	15000
LED-T8-U2-dbl-18W-1200mm-4000K	18	0.5	1600	90	70	4000	15000
LED-T8-U2-dbl-18W-1200mm-6500K	18	0.5	1600	90	70	6500	15000

Application Conditions


IP	IP20
Operating Temperature	-20-45°C
Application Temperature	25°C
Storage Environment	-25-50°C

Mechanical Properties

Optical Material	Glass
Housing Material	PC
Finishing Colour	White

Electrical Supply


Frequency (Hz)	50/ 60
Voltage (V)	220-240
AC/DC	AC

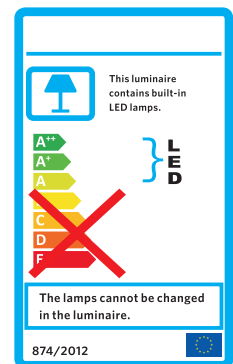

Packaging Information


Item Description	Single Box(1pc/box)		Packaging Unit		
	Dimensions(mm) (LxWxH)	Gross Weight (kg)	Dimensions(mm) (LxWxH)	Gross Weight (kg)	Packing Qty (pcs/unit)
LED-T8-U2-dbl-9W-600mm-3000K	605X27.5X27.5	0.14	640X195X190	3.50	25
LED-T8-U2-dbl-9W-600mm-4000K	605X27.5X27.5	0.14	640X195X190	3.50	25
LED-T8-U2-dbl-9W-600mm-6500K	605X27.5X27.5	0.14	640X195X190	3.50	25
LED-T8-U2-dbl-18W-1200mm-3000K	1215X27.5X27.5	0.27	1240X195X190	6.70	25
LED-T8-U2-dbl-18W-1200mm-4000K	1215X27.5X27.5	0.27	1240X195X190	6.70	25
LED-T8-U2-dbl-18W-1200mm-6500K	1215X27.5X27.5	0.27	1240X195X190	6.70	25
LED-U2-T8 empty batten-1200mm-dbl-CT	1200X34.5X18.5	0.40	1253X192X120	12.00	30
LED-U2-T8 empty batten-600mm-dbl-CT	611X34.5X18.5	0.23	645X195X113	6.99	30
LED-U2-T8 empty batten-1200mm-dbl-R-CT	1200X34.5X18.5	0.62	1260X183X113	8.06	13
LED-U2-T8 empty batten-1200mm-dbl-TT-CT	1200X34.5X18.5	0.65	1260X175X168	6.50	10
LED-U2-T8 empty batten-1200mm-dbl-TTR-CT	1200X34.5X18.5	0.90	1260X175X173	8.10	9

Dimensional Drawing

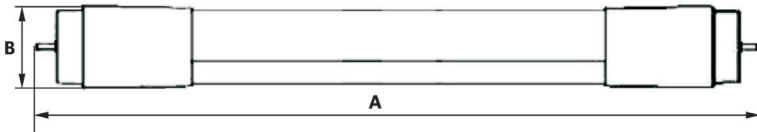

	9W	18W
A(mm)	L604	L1213
B(mm)	Φ28	Φ28

Accessory Information

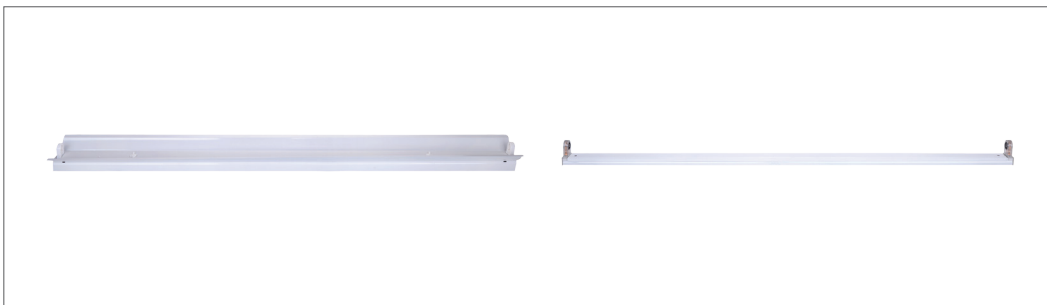

LED Utility2 T8 Empty Batten
(Match with Double-ended T8 Tube)

OPPLE SHANGHAI OFFICE

Building V3, The Mixc, 1799 Wuzhong Road,
Minhang District, Shanghai, China

ZIP: 201103

T +86 21 3855 0000

E intersales@opple.com

WWW.OPPLE.COM/EN