



LED Waterproof Performer

Features

- Optimal heat management, 50,000 hours lifespan
- IP65 protection rating
- IK08 anti-shock rating
- Anti-UV polycarbonate cover

Benefits

- Lasts 5 times longer than fluorescent waterproof
- Water- and dustproof, suitable for outdoor use
- Impact resistant
- Prevents cover yellowing

Application



Specification

Item Code	Item Description	IP Level	Power (W)	Power Factor	Lumen (lm)	Efficacy (lm/W)	Input Current (mA)	CRI	CCT (K)	Beam Angle (°)	Lifetime (L70B50)	MOQ (pcs)
140046147	LED WP-P L1263-25W-4000-FR-GP	IP65	25	0.95	2000	80	140	≥80	4000	130+110	50Khrs	500
140046076	LED WP-P L1263-25W-6500-FR-GP	IP65	25	0.95	2000	80	140	≥80	6500	130+110	50Khrs	500
140046149	LED WP-P L1263-52W-4000-FR-GP	IP65	52	0.95	4300	85	270	≥80	4000	130+110	50Khrs	500
140046078	LED WP-P L1263-52W-6500-FR-GP	IP65	52	0.95	4300	85	270	≥80	6500	130+110	50Khrs	500
140046148	LED WP-P L1563-30W-4000-FR-GP	IP65	30	0.95	2500	80	160	≥80	4000	130+110	50Khrs	500
140046077	LED WP-P L1563-30W-6500-FR-GP	IP65	30	0.95	2500	80	160	≥80	6500	130+110	50Khrs	500
140046150	LED WP-P L1563-65W-4000-FR-GP	IP65	65	0.95	5200	80	330	≥80	4000	130+110	50Khrs	500
140046079	LED WP-P L1563-65W-6500-FR-GP	IP65	65	0.95	5200	80	330	≥80	6500	130+110	50Khrs	500


Technical Specifications	
On / Off Cycles	50,000
Colour Consistency (SDCM)	7
Dimmable	No
Beam Angle (°)	130+110
Finishing Colour	Grey
IP	IP65
IK	IK08
Driver Integrated (Yes/No)	Yes
Glow Wire Test	650°C
Driver Failure Rate	1% at 5,000hrs
Weight (kg/pc)	1.40/1.80/2.20/2.50

Electrical Supply	
Frequency (Hz)	50/60
Voltage (V)	220-240
AC/DC	AC

Mechanical Properties	
Housing Material	PC
Optical Material	PC

Application Conditions	
Operating Temperature	-20~+45°C
Application Temperature	+25°C
Storage Environment	-25~+50°C





CE CB







Packaging Information

Item		Single Box(1pc/box)		Packaging Unit(6pcs/unit)	
Item Code	Item Description	Dimensions(mm) (LxWxH)	Gross Weight (kg)	Dimensions(mm) (LxWxH)	Gross Weight (kg)
140046147	LED WP-P L1263-25W-4000-FR-GP	1270x90x90	2.00	1340x295x205	12.80
140046076	LED WP-P L1263-25W-6500-FR-GP	1270x90x90	2.00	1340x295x205	12.80
140046149	LED WP-P L1263-52W-4000-FR-GP	1270x135x90	2.30	1340x435x205	14.70
140046078	LED WP-P L1263-52W-6500-FR-GP	1270x135x90	2.30	1340x435x205	14.70
140046148	LED WP-P L1563-30W-4000-FR-GP	1570x90x90	3.00	1640x295x205	18.80
140046077	LED WP-P L1563-30W-6500-FR-GP	1570x90x90	3.00	1640x295x205	18.80
140046150	LED WP-P L1563-65W-4000-FR-GP	1570x135x90	3.50	1640x435x205	21.90
140046079	LED WP-P L1563-65W-6500-FR-GP	1570x135x90	3.50	1640x435x205	21.90


Dimensional Drawing

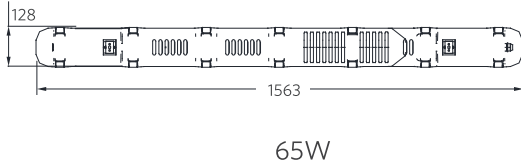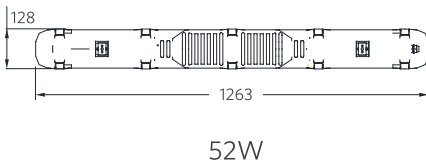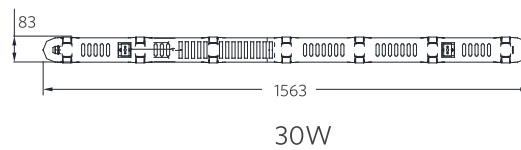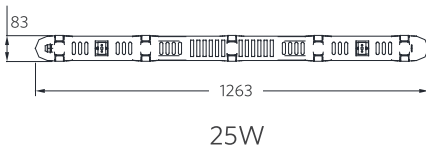

Installation Drawing

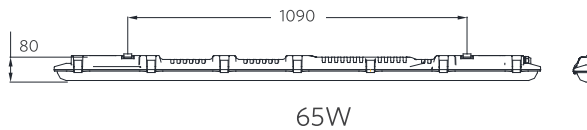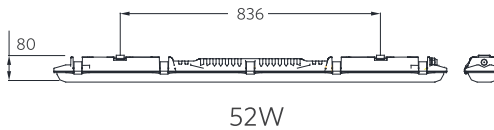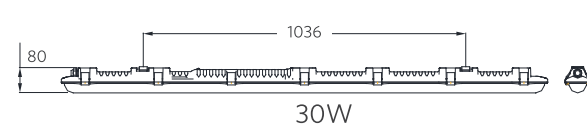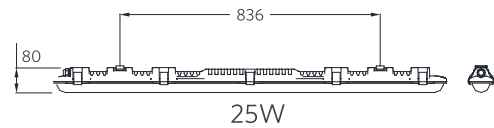

Photometric Data

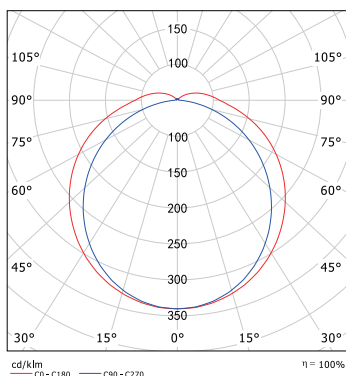

130°+110°(25W/30W/52W/65W)